


Read important warnings and information preceding wire rope section.  
According to Federal Specification RR-W-4100\_ Bright, heavy lube, preformed.

Diameter in Inches	Construction	Approx. Weight per Ft. in Pounds	Breaking Strength in Tons*
5/8	6 x 21 POLY CORE LEFT LAY	.66	16.7
3/4	6 x 21 POLY CORE LEFT LAY	.95	23.8
3/4	6 x 26 POLY CORE LEFT LAY	.95	23.8
3/4	6 x 26 IWRC RIGHT OR LEFT LAY	1.04	29.4
3/4	6 x 31 POLY CORE LEFT LAY	.95	23.8
3/4	6 x 31 IWRC RIGHT OR LEFT LAY	1.04	29.4
7/8	6 x 21 POLY CORE LEFT LAY	1.29	32.2
7/8	6 x 26 IWRC RIGHT OR LEFT LAY	1.42	39.8
7/8	6 x 31 IWRC LEFT LAY	1.42	39.8
1	6 x 26 IWRC RIGHT OR LEFT LAY	1.85	51.7
1.1/8	6 x 19S IWRC RIGHT LAY	2.34	65.0
1.1/4	6 x 19S IWRC RIGHT LAY	2.89	79.9
1.3/8	6 x 19S IWRC RIGHT LAY	3.50	96.0

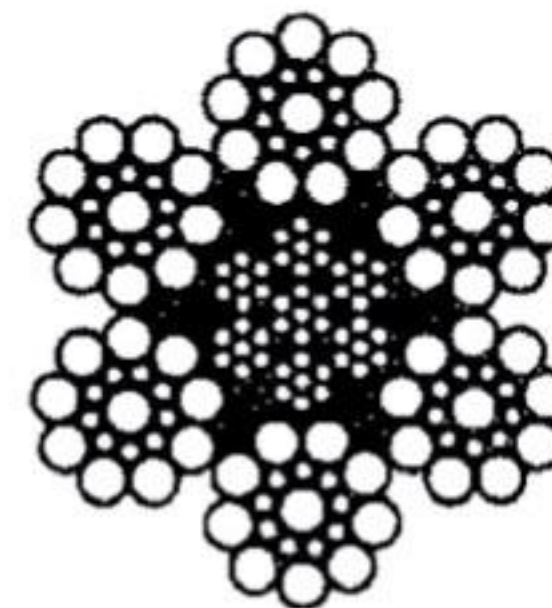

6 x 19 SEALE WITH IWRC

### SAND LINES

According to Federal Specification RR-W-4100 and API 9A. 6 X 7, poly core, bright, heavy lube, RRL, preformed, IPS.

Diameter in Inches	Construction	Approx. Weight per Ft. in Pounds	Breaking Strength in Tons*
3/8	6x7	.21	11,720
1/2	6x7	.38	20,600
9/16	6x7	.48	26,000
5/8	6x7	.59	31,800




6 x 7 PC

### TRAWL CABLE, HEAVY GALVANIZED

Galvanized trawl cable meets Federal Specification RR-W-410D; IPS. 6 X 7, poly core, heavy lube, RRL, preformed.

Diameter in Inches	Construction	Approx. Weight per Ft. in Pounds	Breaking Strength in Tons*
1/4	6x7	.094	4,760
5/16	6x7	.15	7,380
3/8	6x7	.21	10,540
7/16	6x7	.29	14,280
1/2	6x7	.38	18,540
9/16	6x7	.48	23,400
5/8	6 X 19 S	.66	30,000
3/4	6 X 19 S	.95	42,800
7/8	6 X 19 S	1.29	58,000

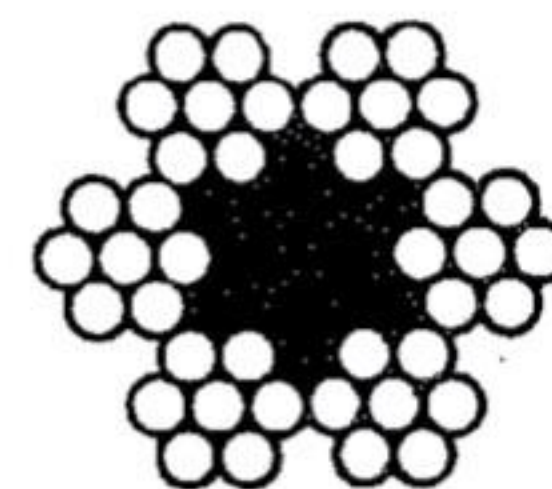

6 x 7 PC

\*Listed for comparison only. Actual operating loads may vary, but should never exceed the recommended design factor or 20% of catalog Breaking Strength.