


Strand is not intended for operation over sheaves or drums. It should be used only where very infrequent flexing will occur. Read important warnings and information preceding wire rope section.

1X7 GALVANIZED STEEL STRAND

According to ASTM A 475, class "A" coating, left regular lay, Extra High Strength.

Diameter Inches	Approx. Wt. per 1000 Ft. in Pounds	Breaking Strength in Pounds*
3/16	73	3,990
1/4	121	6,650
5/16	205	11,200
3/8	273	15,400
1/2	517	26,900

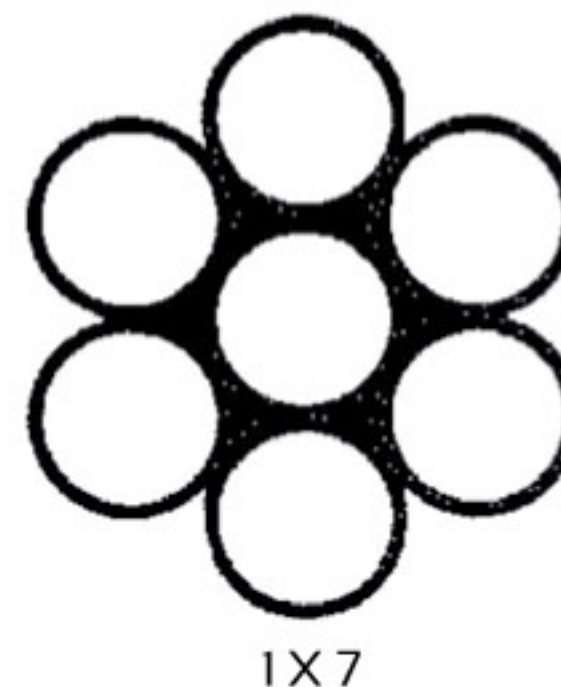


GALVANIZED ALSO AVAILABLE IN LARGER DIAMETER IN 1 X 7 & 1 X 19

1X19 STAINLESS STEEL STRAND

TYPE 304 and 316
Meets dimensional and strength requirements of MIL-W-87161. Left Regular Lay.

Diameter Inches	Approx. Wt. per 1000 Ft. in Pounds	Breaking Strength in Pounds*	
		TYPE 304	TYPE 316
3/32	20	1,200	--
1/8	35	2,100	1,780
5/32	55	3,300	2,800
3/16	77	4,700	4,000
7/32	102	6,300	5,350
1/4	135	8,200	6,900
5/16	210	12,500	10,600
3/8	300	17,500	14,800

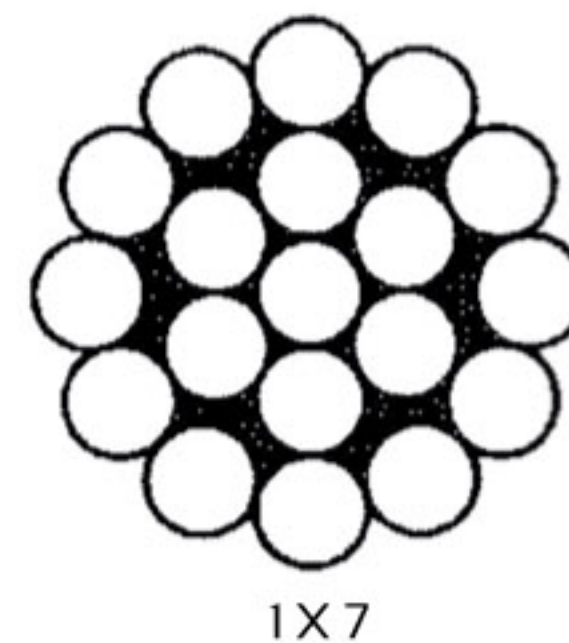

*Listed for comparison only. Design factors vary between 6:1 and 3:1 depending on application.

WIRE ROPE IMPACT CUTTER



SPECIFICATIONS: All are portable. Firm base required for operation.

Model	Capacity	Height	Base	Weight
1	5/8'	6'	3 1/2'	7lbs.
1A	1 1/4'	7'	6 1/4'	15 lbs.
2	1 1/2'	9'	7 3/4'	28lbs.