


Small diameter 7 x 7 and 7 x 19 construction wire rope is sometimes referred to as "aircraft cable". It is not intended for Aircraft use but designed for industrial and marine applications. When using wire rope clips with plastic coated cable, match clip to uncoated cable diameter (3/16" cable coated to 1/4" takes 3/16" clip.) Strip plastic coating off cable where clips will be positioned for full holding power.

Read important warnings and information preceding wire rope section.

CLEAR VINYL COATED GALVANIZED CABLE

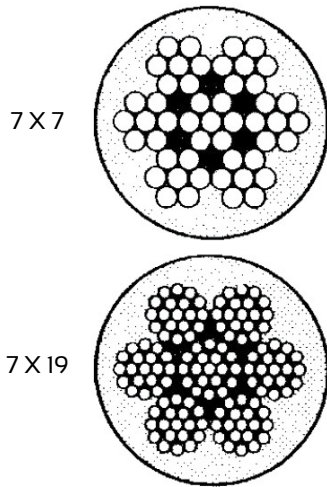

Cable Diameter	Coated to	Approx. Wt. per 1000 Ft. in Pounds	Breaking Strength in Pounds*	Construction
1/16" **	3/32"	9.3	480	7x7
1/16" **	1/8"	11.8	480	7x7
3/32" **	1/8"	18.5	920	7x7
3/32" **	3/16"	25.8	920	7x7
1/8" **	3/16"	35.2	1,700	7x7
3/32" **	1/8"	19.9	1,000	7 X 19
1/8" **	3/16"	36.2	2,000	7 X 19
3/16" **	1/4"	77.5	4,200	7 X 19
1/4" **	5/16"	123.0	7,000	7 X 19
5/16" **	3/8"	197.0	9,800	7 X 19
3/8" **	7/16"	270.0	14,400	7 X 19




DISPLAY REELS

DISPLAY REELS- Vinyl Coated Galvanized Cable

Cable Diameter	Coated to	Approx. Wt. per 1000 Ft. in Pounds	Construction	Lengths Available in Ft.	
3/32" **	3/16"	25.8	7x7	500	250
1/8"	3/16"	35.2	7x7	500	250
3/16" **	1/4"	77.5	7 X 19	500	250
1/4" **	5/16"	123.0	7 X 19	500	200
5/16" **	3/8"	197.0	7 X 19	500	200

CLEAR VINYL COATED STAINLESS CABLE

TYPE 304

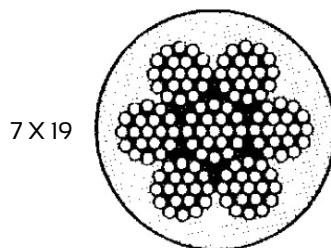

Cable Diameter	Coated to	Approx. Wt. per 1000 Ft. in Pounds	Breaking Strength in Pounds	Construction
1/8" **	3/16"	36.2	1,760	7 X 19
3/16" **	1/4"	77.5	3,700	7 X 19
1/4" **	5/16"	123.0	6,400	7 X 19
5/16" **	3/8"	197.0	9,000	7 X 19
3/8" **	7/16"	270.0	12,000	7 X 19

Also available on special order: nylon and vinyl in various colors.

*Listed for comparison only. Actual operating loads may vary, but should never exceed recommended design factor or 20% of catalog Breaking Strength.

**Uncoated cable according to Federal Specification RR-W-4100.

Uncoated cable meets dimensional and strength requirements of MIL-W-834200.